

## Family


# Ineli

Ineli is a pendant luminaire with two luminous fluxes and a height of only 27 mm, which is best used in an office. The Ineli luminaire with direct-indirect distribution of light will attract you with its low aluminium profile which forms the frame of the lighting area. Thanks to its superior technical features, it can also make every meeting room, informal café or relaxation zone more pleasant. Power supplied via the suspension wires without the presence of a power cable provides a clean and fine detail, which makes this minimalist design of Ineli luminaire fit easily into all types of interiors. The luminaire can be hung straight or at any angle, which gives the space an impression of uniqueness and airiness. In addition, it can be perfectly combined with the free-standing version, i.e. the Sineli luminaire.

Type of installation	Suspended
Light distribution	Direct-indirect
Colour of the luminaires	Black, Silver, White
Colour Temperature	3000 K warm white, 4000 K cool white, 2700 K - 6500 K Tunable White
Material	Aluminium
Light source	LED MODUL
MacAdam Light source	3
Connection of the luminaires	ON/OFF DALI Tunable white
Lifetime	L80/B20 50 000 hours
Warranty	60 months

## Luminaire family variants Ineli

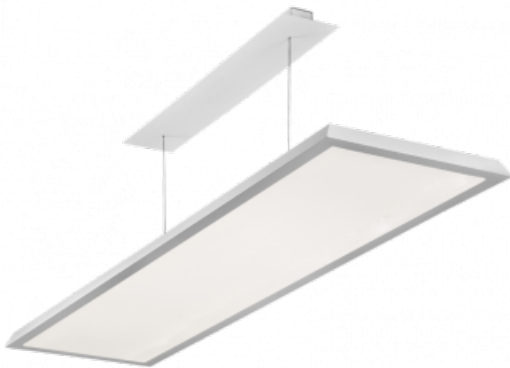

**Ineli**

**Assembly**

**Light distribution**


**Energy class**

A++, A+, A


**Marks**


Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
235-571I-20GGE/840, W	1194 × 294 × 27	47.2	7000	4000	-
235-571I-20GHE/840, W	1194 × 294 × 27	66.7	9500	4000	-

AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

Notes	Colour of the luminaires	
	Colour Temperature	3000 K warm white 4000 K cool white 2700 K - 6500 K Tunable White
	Optic system	Microprisma
	Connection of the luminaires	ON/OFF DALI Tunable white
	Ra	80 90

Luminaires come complete with all necessary accessories.

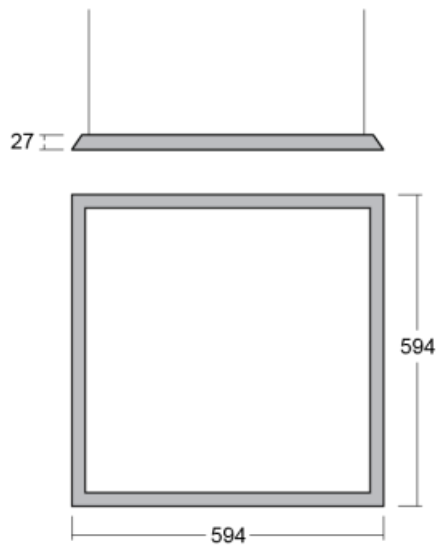**Ineli**

**Assembly**

**Light distribution**


**Energy class**

A++, A+, A

**Marks**


Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
235-501I-10GGE/840, W	594 × 594 × 27	47.2	7000	4000	-
235-501I-10GHE/840, W	594 × 594 × 27	66.7	9500	4000	-









AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

Notes	Colour of the luminaires	
	Colour Temperature	3000 K warm white 4000 K cool white 2700 K - 6500 K Tunable White
	Optic system	Microprisma
	Connection of the luminaires	ON/OFF DALI Tunable white
	Ra	80 90




Luminaires come complete with all necessary accessories.

## Legend

### Type of installation

	Recessed lights		Wall mounted lights
	Semi-recessed luminaire		Suspended lights
	Surface lights		Free-standing lights
	3 circuit track lights		Table lamp lights








### Light distribution

	Direct luminaire
	Direct-indirect luminaire
	Indirect luminaire

### Light source

	<b>Tunable White</b> adjusting the color temperature		<b>RealWhite</b> true display of white color
	<b>RealColour</b> true display of colors Ra≥97		<b>StrongColour</b> highlight one color

### Marks

	Luminaire of electrical classification I (accessible conductive parts are connected to a protective cable)
	Luminaire of electrical classification II (accessible conductive parts are connected to a protective cable)
	Luminaire of electrical classification III (protection against electric shock is based on double or reinforced insulation)
	European mark of conformity that indicates the conformity of the properties of the product with all the harmonized standards and regulations of the European Community that apply to it
	Luminaires are certified according to the European ENEC system
	Recommended mounting hole size
	IP code indicating the degree of protection of live parts
	Eurasian Conformity

### 09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

Optic system

Electrical connection

Colour









### Optic system

C	Clear cover	L	Plain aluminium reflector
D	Asymmetric reflector	M	Matt parabolic louvre
E	Polished parabolic louvre, high LOR	S	SPOT - narrow angle
F	FLOOD - wide angle	U	MEDIUM - middle angle
I	Microprismatic optical system	W	Wide beam angle
K	Opal diffuser		

### Electrical connection

D	DALI dimmable	P	Sensor and electronic ballast
E	Electronic ballast non-dimmable	T	By switch dimmable (touch dimm)
M	Electronic ballast non-dimmable with 1h emergency	TD	DALI or by switch (touch dimm) dimmable
M3	Electronic ballast non-dimmable with 3h emergency	U	Dimmable luminaire with dimmer on the luminaire

### Colour

W	 White	B	 Black	S	 Silver
1021	 RAL 1021	3000	 RAL 3000	6021	 RAL 6021
7006	 RAL 7006	7045	 RAL 7045		



## Family

# Sineli

Ordinary free standing luminaires have long been out of the game. We have designed and developed an ideal design luminaire of the Sineli family, which will provide you with comfort at work and will improve your concentration. The Sineli luminaires are designed for both table mounting and free standing, so you can move them freely at any time, thus adapting the arrangement of the items in the room according to your needs. Sturdy construction and weight prevent accidental tipping and ensure reliable stability. The shape of Sineli resembles a spaceship arriving from a distant galaxy, which can make your office, meeting room or private apartment more impressive.

Type of installation	Free-standing
Light distribution	Direct-indirect
Colour of the luminaires	Black, Silver, White
Colour Temperature	3000 K warm white, 4000 K cool white
Material	Aluminium
Light source	LED MODUL
MacAdam Light source	3
Connection of the luminaires	ON/OFF DALI + sensor Other type of dimming
Lifetime	L80/B20 50 000 hours
Warranty	60 months

## Luminaire family variants Sineli



**Sineli**
**Assembly**


**Light distribution**

**Energy class**

A++, A+, A









**Marks**


Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
230-731I-15GGE/840, W	920 × 360 × 2100	48.8	7000	4000	< 16.3
230-781I-15GGE/840, W	920 × 360 × 2100	48.8	7000	4000	< 16.3
230-731I-15GHE/840, W	920 × 360 × 2100	65.3	9130	4000	< 17.2
230-781I-15GHE/840, W	920 × 360 × 2100	65.3	9130	4000	< 17.2




Notes	Colour of the luminaires	
	Colour Temperature	3000 K warm white 4000 K cool white
	Optic system	Microprisma
	Connection of the luminaires	ON/OFF DALI + sensor Other type of dimming
	Ra	80

## Legend

### Type of installation

	Recessed lights		Wall mounted lights
	Semi-recessed luminaire		Suspended lights
	Surface lights		Free-standing lights
	3 circuit track lights		Table lamp lights








### Light distribution

	Direct luminaire
	Direct-indirect luminaire
	Indirect luminaire

### Light source

	<b>Tunable White</b> adjusting the color temperature		<b>RealWhite</b> true display of white color
	<b>RealColour</b> true display of colors Ra≥97		<b>StrongColour</b> highlight one color

### Marks

	Luminaire of electrical classification I (accessible conductive parts are connected to a protective cable)
	Luminaire of electrical classification II (accessible conductive parts are connected to a protective cable)
	Luminaire of electrical classification III (protection against electric shock is based on double or reinforced insulation)
	European mark of conformity that indicates the conformity of the properties of the product with all the harmonized standards and regulations of the European Community that apply to it
	Luminaires are certified according to the European ENEC system
	Recommended mounting hole size
	IP code indicating the degree of protection of live parts
	Eurasian Conformity

### 09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

Optic system

Electrical connection

Colour









### Optic system

C	Clear cover	L	Plain aluminium reflector
D	Asymmetric reflector	M	Matt parabolic louvre
E	Polished parabolic louvre, high LOR	S	SPOT - narrow angle
F	FLOOD - wide angle	U	MEDIUM - middle angle
I	Microprismatic optical system	W	Wide beam angle
K	Opal diffuser		

### Electrical connection

D	DALI dimmable	P	Sensor and electronic ballast
E	Electronic ballast non-dimmable	T	By switch dimmable (touch dimm)
M	Electronic ballast non-dimmable with 1h emergency	TD	DALI or by switch (touch dimm) dimmable
M3	Electronic ballast non-dimmable with 3h emergency	U	Dimmable luminaire with dimmer on the luminaire

### Colour

W	 White	B	 Black	S	 Silver
1021	 RAL 1021	3000	 RAL 3000	6021	 RAL 6021
7006	 RAL 7006	7045	 RAL 7045		