

kreon prologe

kreon prologe is a range of surface mounted cubic downlights characterised by a compact form and deep set LED position. kreon prologe comes in two sizes to suit spatial requirements, providing a discreet yet functional solution to general or accent lighting within architecture. Finished in black for a dramatic ceiling contrast or pure white.

kreon prologe in-line or in-dolma set the cubic downlights accordingly either fully-recessed or semi-recessed in a tailor made extruded profile. The profile is available in black anodised or satin silver anodised.



prologe 80 single, black





prologe 80 in-dolma double, white, black profile



prologe 145 double, black

kreon prologe 80

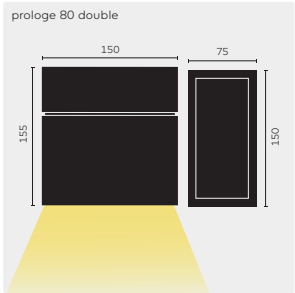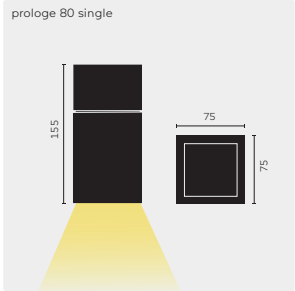

	Colour	KR-code	Light sources	8927 2700K, CR183	8330 3000K, CR183	8340 4000K, CR183	9027 2700K, CR190	9030 3000K, CR190	9040 4000K, CR190	9927 2700K, CR198	9930 3000K, CR198	9940 4000K, CR198	SW Switchable ON/OFF	Optional accessories
prologe 80 single fixed LED Gear: excl. Ⓞ	○	KR967121	①	●	●	●	●	●	●	●	●	●		■
	●	KR967122	①	●	●	●	●	●	●	●	●	●		■
prologe 80 single fixed LED Gear: incl.	○	KR967131	②	●	●	●	●	●	●				●	
	●	KR967132	②	●	●	●	●	●	●				●	
prologe 80 single fixed LED MR16 Gear: incl., lamp: excl.	○	KR968111	③											
	●	KR968112	③											
prologe 80 single fixed LED PAR16 Lamp: excl.	○	KR968131	④											
	●	KR968132	④											
prologe 80 double fixed LED Gear: excl. Ⓞ	○	KR967221	⑤	●	●	●	●	●	●	●	●	●		■
	●	KR967222	⑤	●	●	●	●	●	●	●	●	●		■
prologe 80 double fixed LED Gear: incl.	○	KR967231	⑥	●	●	●	●	●					●	
	●	KR967232	⑥	●	●	●	●	●					●	
prologe 80 double fixed LED MR16 Gear: incl., lamp: excl.	○	KR968211	③											
	●	KR968212	③											
prologe 80 double fixed LED PAR16 Lamp: excl.	○	KR968231	④											
	●	KR968232	④											

Optional accessories




Driver	Code	Description
	KR772024	LED driver, 500mA, ON/OFF, 20W
	KR772220	LED driver, 500mA, 1-10V, 20W
	KR772126	LED driver, 500mA, DALI, 18W
	KR772123	LED driver, 500mA, DALI, 27W

	CRI	CCT	Voltage	Wattage	Drive current	Fixture lumen
① LED	CR183	2700K/3000K/4000K		6,6W	500mA	643lm
	CR190	2700K/3000K/4000K		7,9W	500mA	643lm
	CR198	2700K/3000K/4000K		9,2W	500mA	643lm
② LED	CR183	2700K/3000K/4000K	230V	4,5W		480lm
	CR190	2700K/3000K/4000K	230V	5,4W		480lm
③ LED MR16	fitting GU5,3		230V	(2x) 20W		
④ LED PAR16	fitting GU10		230V	(2x) 20W		
⑤ LED	CR183	2700K/3000K/4000K		2 x 6,6W	500mA	1287lm
	CR190	2700K/3000K/4000K		2 x 7,9W	500mA	1287lm
	CR198	2700K/3000K/4000K		2 x 9,2W	500mA	1287lm
⑥ LED	CR183	2700K/3000K/4000K	230V	2 x 4,5W		960lm
	CR190	2700K/3000K/4000K	230V	2 x 5,4W		960lm

REMARKS

CDP: Conical Deglaring Prism
IP 20

kreon prologe 80 in-line/in-dolma

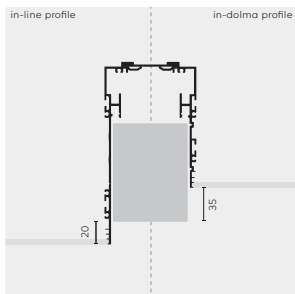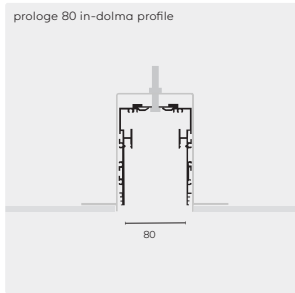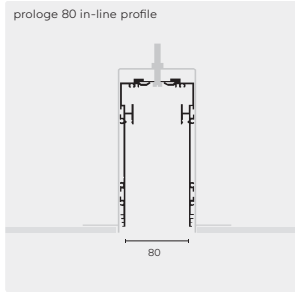

prologe 80 in-line profile aluminium
 Ø LxW (L+10)x105 D 245

prologe 80 in-dolma profile aluminium
 Ø LxW (L+10)x105 D 190

■ **Optional accessories**

Corner cut

Electrical wiring

Colour
 KR-code
 Optional accessories


●	KR765102	■
●	KR765103	■
●	KR765002	■
●	KR765003	■

KR765402	90° corner cut prologe 80 in-line, black anodised
KR765403	90° corner cut prologe 80 in-line, natural anodised
KR765302	90° corner cut prologe 80 in-dolma, black anodised
KR765303	90° corner cut prologe 80 in-dolma, natural anodised
KR705401	Extra electrical wiring



REMARKS

kreon prologe profile should be finished with polyester gypsum. The profile is supplied pre-assembled (all gears incl.) Combinations can be specified on order form.
 Max. length single profile: 6000mm.
 Shipping length depends on transport possibilities.
 IP40

prologe 80 single in-line

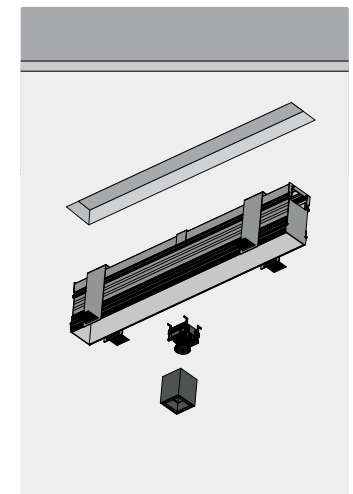

kreon prologe 80 in-line/in-dolma

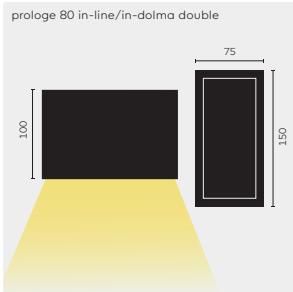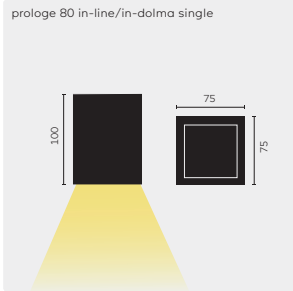

	Colour	KR-code	Light sources	8927 2700K, CR183	8330 3000K, CR183	8340 4000K, CR183	9027 2700K, CR190	9030 3000K, CR190	9040 4000K, CR190	9927 2700K, CR198	9930 3000K, CR198	9940 4000K, CR198	SW Switchable ON/OFF	VO 1-10V dimming	DI DALI dimming	Optional accessories
prologe 80 in-line/in-dolma single fixed LED Gear: electr. incl.	○	KR965121	①	●	●	●	●	●	●	●	●	●	●	●	●	
	●	KR965122	①	●	●	●	●	●	●	●	●	●	●	●	●	
prologe 80 in-line/in-dolma single fixed LED MR16 Gear: electr. incl., lamp: excl.	○	KR965111	②													■
	●	KR965112	②													■
prologe 80 in-line/in-dolma single fixed LED PAR16 Lamp: excl.	○	KR965131	③													
	●	KR965132	③													
prologe 80 in-line/in-dolma double fixed LED Gear: electr. incl.	○	KR965221	④	●	●	●	●	●	●	●	●	●	●	●	●	
	●	KR965222	④	●	●	●	●	●	●	●	●	●	●	●	●	
prologe 80 in-line/in-dolma double fixed LED MR16 Gear: electr. incl., lamp: excl.	○	KR965211	⑤													■
	●	KR965212	⑤													■
prologe 80 in-line/in-dolma double fixed LED PAR16 Lamp: excl.	○	KR965231	⑥													
	●	KR965232	⑥													
Optional accessories																
Frosted glass		KR760109	Frosted glass prologe 80 in-line/in-dolma single LED MR16													
		KR760209	Frosted glass prologe 80 in-line/in-dolma double LED MR16													

	CRI	CCT	Voltage	Wattage	Fixture lumen
① LED	CR183	2700K/3000K/4000K	230V	6,6W	643lm
	CR190	2700K/3000K/4000K	230V	7,9W	643lm
	CR198	2700K/3000K/4000K	230V	9,3W	643lm
② LED MR16	fitting GU5,3		230V	20W	
③ LED PAR16	fitting GU10			20W	
④ LED	CR183	2700K/3000K/4000K	230V	2 x 6,6W	1287lm
	CR190	2700K/3000K/4000K	230V	2 x 7,9W	1287lm
	CR198	2700K/3000K/4000K	230V	2 x 9,3W	1287lm
⑤ LED MR16	fitting GU5,3		230V	2 x 20W	
⑥ LED PAR16	fitting GU10		230V	2 x 20W	


REMARKS
CDP: Conical Deglaring Prism
IP20

kreon prologe 80 in-line/in-dolma





	KR-code	Light sources	9027 2700K, CRI90	9030 3000K, CRI90	9040 4000K, CRI90
prologe 80 ligna in-line/in-dolma Gear: incl., protocol: DALI Length: 562mm, OLDP diffuser incl.	<u>KR965153</u>	①	●	●	●
prologe 80 ligna in-line/in-dolma Gear: incl., protocol: DALI Length: 843mm, OLDP diffuser incl.	<u>KR965563</u>	②	●	●	●
prologe 80 ligna in-line/in-dolma Gear: incl., protocol: DALI Length: 1124mm, OLDP diffuser incl.	<u>KR965573</u>	③	●	●	●
prologe 80 ligna in-line/in-dolma corner Gear: incl., protocol: DALI Length: 1124mm, OLDP diffuser incl.	<u>KR965173</u>	③	●	●	●
prologe 80 ligna in-line/in-dolma Gear: incl., protocol: DALI Length: 1405mm, OLDP diffuser incl.	<u>KR965683</u>	④	●	●	●
prologe 80 ligna in-line/in-dolma Gear: incl., protocol: DALI Length: 1686mm, OLDP diffuser incl.	<u>KR965693</u>	⑤	●	●	●
prologe 80 ligna in-line/in-dolma corner Gear: incl., protocol: DALI Length: 1686mm, OLDP diffuser incl.	<u>KR965193</u>	⑤	●	●	●
prologe 80 ligna in-line/in-dolma emergency Gear: incl., protocol: DALI Length: 1686mm, OLDP diffuser incl.	<u>KR965393</u>	⑤	●	●	●

		CRI	CCT	Voltage	Wattage	Fixture lumen
①	LED	CRI90+	2700K/3000K/4000K	230V	19W	1065lm
②	LED	CRI90+	2700K/3000K/4000K	230V	28,6W	1597lm
③	LED	CRI90+	2700K/3000K/4000K	230V	38,1W	2129lm
④	LED	CRI90+	2700K/3000K/4000K	230V	47,7W	2661lm
⑤	LED	CRI90+	2700K/3000K/4000K	230V	57,2W	3194lm

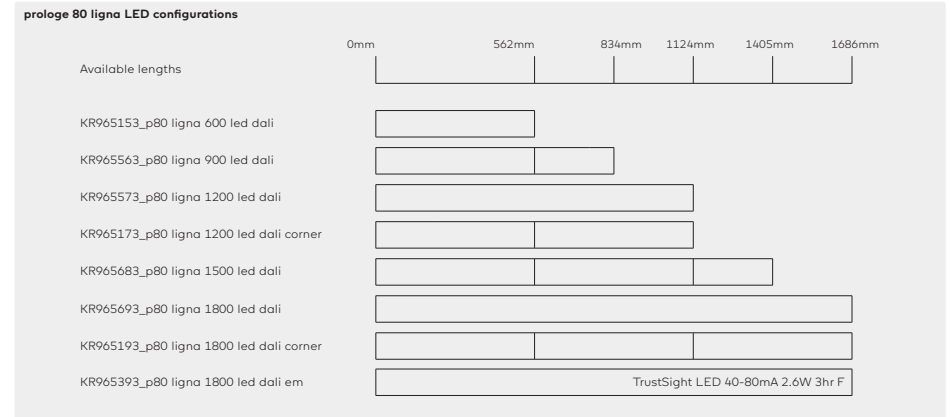

REMARKS
 OLDLP: opalised linear deglaring
 prism
 IP40

kreon prologe 145

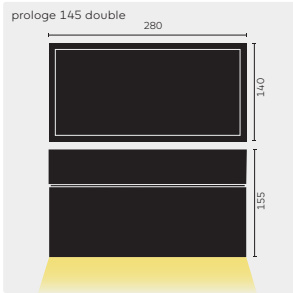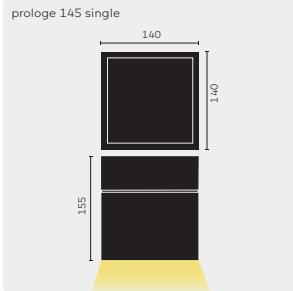

prologe 145 single directional
Gear: incl.
Lamp: incl.



prologe 145 double directional
Gear: incl.
Lamp: incl.

Colour	KR-code	Light sources	9527 2700K, CRI95	FL Flood 25°	SM Switchable ON/OFF	YO 1-10V dimming	DD DALI dimming
○	<u>KR988651</u>	①	●	●	●	●	●
●	<u>KR988652</u>	①	●	●	●	●	●
○	<u>KR988751</u>	②	●	●	●	●	●
●	<u>KR988752</u>	②	●	●	●	●	●

	CRI	CCT	Voltage	Wattage	Fixture lumen	
①	LED	CRI95	2700K/3000K	230V	16,1W	900lm
②	LED	CRI95	2700K/3000K	230V	2 x 16,1W	2 x 900lm

REMARKS

IP20