



## Family

# Ilbi

When Matúš Opálka closed himself into his study for a month, we were wondering what he would come up with. He designed lighting that gives off a gentle but luxurious effect. The indirect two-sided emission with reflection from the wall creates a pleasantly soft light with adjustable intensity.

Type of installation	Surface, Wall mounted, Suspended
Light distribution	Indirect
Colour of the luminaires	Black, Silver, White
Colour Temperature	3000 K warm white, 4000 K cool white
Material	Aluminium
Light source	LED MODUL
Connection of the luminaires	ON/OFF DALI Other type of dimming
Lifetime	L80/B20 0 hours

## Luminaire family variants Ilbi



Ilbi

Assembly



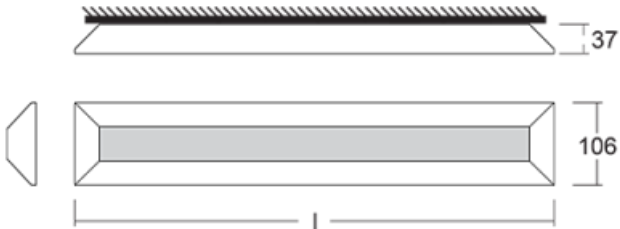
Light distribution



Energy class

A++, A+, A

Marks



Notes

Colour of the luminaires

Colour Temperature 3000 K warm white  
4000 K cool white









Optic system Opal diffuser

Connection of the luminaires ON/OFF  
DALI  
Other type of dimming




Ra 80

## Legend





### Type of installation

 Recessed lights	 Wall mounted lights
 Semi-recessed luminaire	 Suspended lights
 Surface lights	 Free-standing lights
 3 circuit track lights	 Table lamp lights






### Light distribution

 Direct luminaire
 Direct-indirect luminaire
 Indirect luminaire

### Light source

 <b>Tunable White</b> adjusting the color temperature	 <b>RealWhite</b> true display of white color
 <b>RealColour</b> true display of colors Ra≥97	 <b>StrongColour</b> highlight one color

### Marks

 Luminaire of electrical classification I (accessible conductive parts are connected to a protective cable)
 Luminaire of electrical classification II (accessible conductive parts are connected to a protective cable)
 Luminaire of electrical classification III (protection against electric shock is based on double or reinforced insulation)
 European mark of conformity that indicates the conformity of the properties of the product with all the harmonized standards and regulations of the European Community that apply to it
 Luminaires are certified according to the European ENEC system

 Recommended mounting hole size

 IP code indicating the degree of protection of live parts

 Eurasian Conformity

### 09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

Optic system

Electrical connection

Colour









### Optic system

C	Clear cover	L	Plain aluminium reflector
D	Asymmetric reflector	M	Matt parabolic louvre
E	Polished parabolic louvre, high LOR	S	SPOT - narrow angle
F	FLOOD - wide angle	U	MEDIUM - middle angle
I	Microprismatic optical system	W	Wide beam angle
K	Opal diffuser		

### Electrical connection

D	DALI dimmable	P	Sensor and electronic ballast
E	Electronic ballast non-dimmable	T	By switch dimmable (touch dimm)
M	Electronic ballast non-dimmable with 1h emergency	TD	DALI or by switch (touch dimm) dimmable
M3	Electronic ballast non-dimmable with 3h emergency	U	Dimmable luminaire with dimmer on the luminaire

### Colour

W	 White	B	 Black	S	 Silver
1021	 RAL 1021	3000	 RAL 3000	6021	 RAL 6021
7006	 RAL 7006	7045	 RAL 7045		