
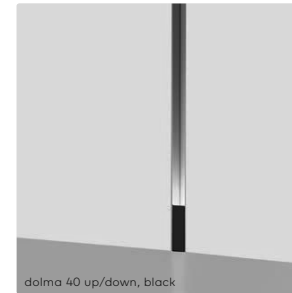


# kreon dolma

kreon dolma indoor has a visible width of 40mm, 80mm or 145mm. The conduit is a recessed aluminium profile that can easily be installed in walls or ceilings. The made to measure profile is finished in natural or black anodized aluminium.

Standard LED lighting elements can be integrated on either one extremity or both or in the middle of the profile for a fading lighting effect. Use kreon dolma as a beacon in residential or public environments.

kreon dolma indoor is available in three width options and has a satin silver anodised finish, while kreon dolma 80 outdoor is offered in silver or black finishes as standard. Light sources can be positioned centrally along the profiles or mounted at either end. kreon dolma shower is a class 3 profile for exclusive use in indoor wet areas such as bathrooms.

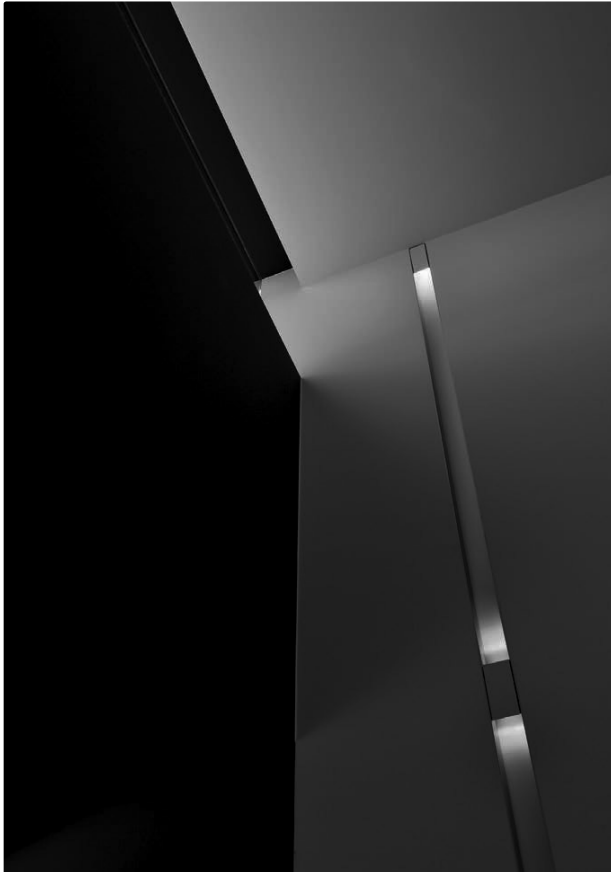


dolma 40 up/down, black



dolma 80 up/down, white





dolma 145 symmetrical, grey

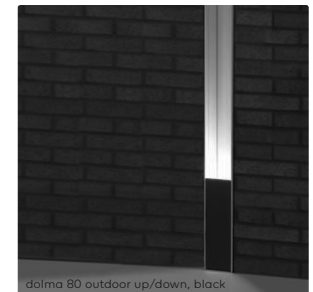

dolma 80 outdoor up/down, black

# kreon dolma 40

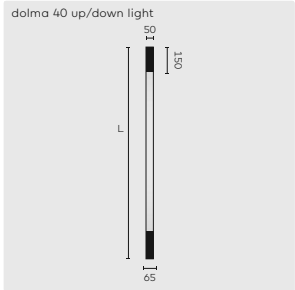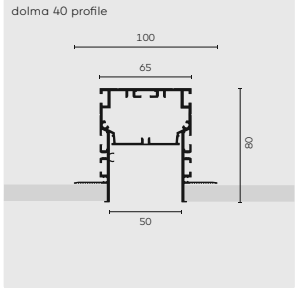

**dolma 40 profile**  
Min depth: 80, thickness boardmaterial: max. 12,5 mm, IP40



**dolma 40 up/down light**  
Gear: incl., 230V, IP20

■ **Optional accessories**

Driver

Colour	KR-code
●	KR745002
●	KR745003

Colour	KR-code	Light sources	SW	VD	DD	EX	Optional accessories
○	KR915341	9027 2700K, CRI90+	●	●	●	●	■
●	KR915342	9030 3000K, CRI90+	●	●	●	●	■

KR772142	LED driver, 1050mA, 1-10V, 39W
KR772443	LED driver, 1050mA, DALI, 15W


	LED	CRI	CCT	Voltage	Wattage	Drive current	Fixture lumen
①	SW/VD/DD	CRI90+	2700K/3000K	230V	3,2W		111lm
	EX	CRI90+	2700K/3000K	3V	3,2W	1050mA	111lm



**REMARKS**

① kreon dolma profile should be finished with polyester gypsum or in combination with other dry building materials. Min. length: 1 m (gear incl.) or 0,6m (gear excl.). Max 2 profile pieces. In case of 2 profile pieces, two up/down lights will be placed against each other to cover the split line.

kreon dolma profiles are supplied fully pre-assembled, including all modules, gears and connections. Max. Length single profile: 5900mm. Shipping length depends on the transport possibilities.

dolma 40

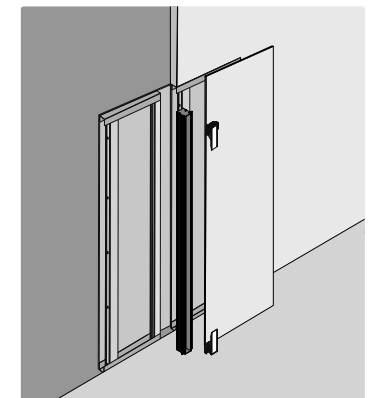

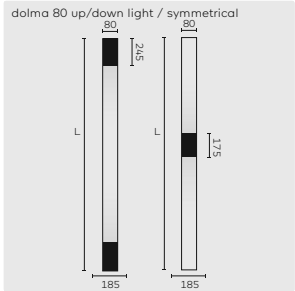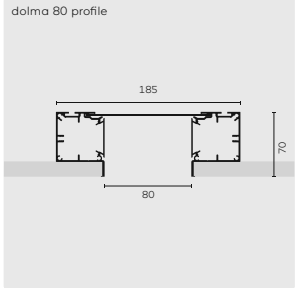

**dolma 80 profile**  
Min depth: 80, thickness boardmaterial: max. 15mm, IP40

Colour	KR-code
●	KR715002
●	KR715003



**dolma 80 up/down light**  
Gear: incl., 230V, IP20



**dolma 80 symmetrical light**  
Gear: incl., 230V, IP20

Colour	KR-code	Light sources	8027 2700K, CRI80+	8030 3000K, CRI80+	SW Switchable ON/OFF	VD 1-10V dimming	DD DALI dimming	Optional accessories
○	KR915441	①	●	●	●	●	●	■
●	KR915442	①	●	●	●	●	●	■
●	KR915443	①	●	●	●	●	●	■
○	KR915471	①	●	●	●	●	●	■
●	KR915472	①	●	●	●	●	●	■
●	KR915473	①	●	●	●	●	●	■

■ **Optional accessories**

Electrical wiring	KR705401	Extra electrical wiring (for an extra circuit)
EURO connector	KR705403	EURO connector


	CRI	CCT	Voltage	Wattage	Fixture lumen
①	LED CRI80+	2700K/3000K	230V	8,4W	126lm

**REMARKS**



① kreon dolma profile should be finished with polyester gypsum or in combination with other dry building materials.

kreon dolma profiles are supplied fully pre-assembled, including all modules, gears and connections. Max. Length single profile: 5900mm. Shipping length depends on the transport possibilities.

dolma 80

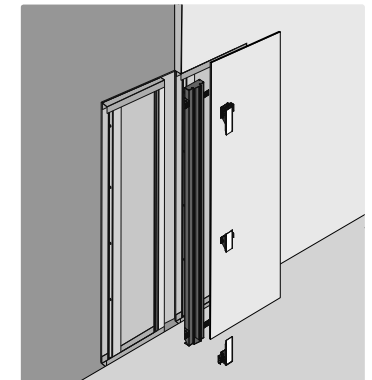

# kreon dolma 80 IP

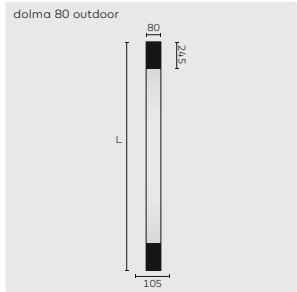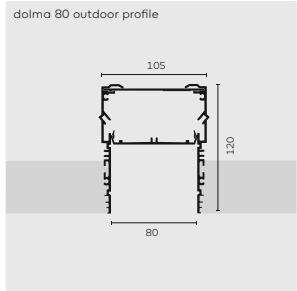

## dolma 80 outdoor profile ① Min depth: 125, IP40

Colour  
KR-code

● KR715402

● KR715403

## dolma 80 shower profile ① Min depth: 125, IP40

● KR715502

● KR715503

## dolma 80 outdoor up/down light Watertight gearbox: incl., 230V, IP55

○ KR915961 ①

● KR915962 ①

## dolma 80 shower up/down light Gear: excl., IP55 ②

○ KR915971 ②

● KR915972 ②

Light sources  
8027 2700K, CRI80+  
8030 3000K, CRI80+  
SW Switchable ON/OFF  
VD 1-10V dimming  
DD DALI dimming  
Optional accessories

### ■ Optional accessories

Driver (IP20)

KR772034 LED driver, 700mA, ON/OFF, 20W

KR772232 LED driver, 700mA, 1-10V, 20W

KR772236 LED driver, 700mA, DALI, 18W


### REMARKS

① kreon dolma outdoor profile is IP40, kreon dolma outdoor up/down module is IP55. Water conduit needs to be placed below and behind the profile, both for outdoor and shower profile. Check installation manual.

kreon dolma profiles are supplied fully pre-assembled, including all modules, gears and connections. Max. Length single profile: 5900mm. Shipping length depends on the transport possibilities.


	CRI	CCT	Voltage	Wattage	Drive current	Fixture lumen
①	LED CRI80+	2700K/3000K	230V	8,4W		204lm
②	LED CRI80+	2700K/3000K		8,4W	700mA	204lm

dolma 80 outdoor

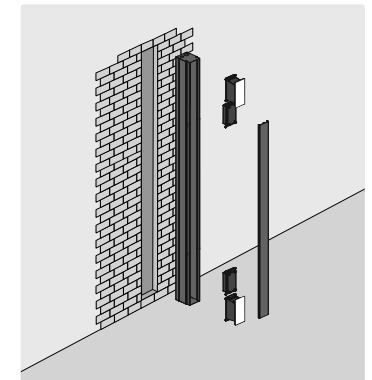


# kreon dolma 145

dolma 145 profile

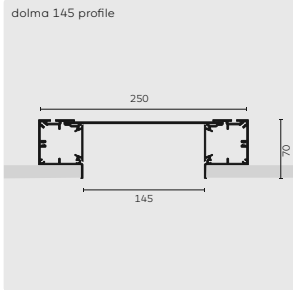

dolma 145 up/down light / symmetrical

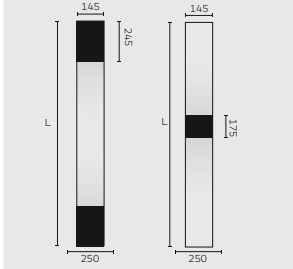

**dolma 145 profile**  
Min depth: 80, thickness boardmaterial: max. 15mm, IP40

Colour	KR-code
●	KR725002
●	KR725003



**dolma 145 up/down light**  
Gear: incl., 230V, IP20



**dolma 145 symmetrical light**  
Gear: incl., 230V, IP20

Colour	KR-code	Light sources	8027 2700K, CRI80+	8030 3000K, CRI80+	SW Switchable ON/OFF	VD 1-10V dimming	DD DALI dimming	Optional accessories
○	KR925441	①	●	●	●	●	●	■
●	KR925442	①	●	●	●	●	●	■
●	KR925443	①	●	●	●	●	●	■
○	KR925471	①	●	●	●	●	●	■
●	KR925472	①	●	●	●	●	●	■
●	KR925473	①	●	●	●	●	●	■

■ **Optional accessories**

Electrical wiring	KR705401	Extra electrical wiring (for an extra circuit)
EURO connector	KR705403	EURO connector

	CRI	CCT	Voltage	Wattage	Fixture lumen
①	LED CRI80+	2700K/3000K	230V	2 x 8,4W	297lm

**REMARKS**

① kreon dolma profile should be finished with polyester gypsum or in combination with other dry building materials.

kreon dolma profiles are supplied fully pre-assembled, including all modules, gears and connections. Max. Length single profile: 5900mm. Shipping length depends on the transport possibilities.

dolma 145

