

DECORATIVE

WOODEN POLES

MAINTENANCE GUIDE





MAINTENANCE GUIDE FOR WOODEN POLES

CONTENT



VALMONT PROCESS OF STAIN APPLICATION	2
AGING	3
MAINTENANCE PROCEDURE	4
Phases simplified	
NDT testing	
MAINTENANCE KITS	5
STANDARD COATING REVISION	6
REFINISHING THE POLE	7
VANDALISM CORRECTIONS	
Graffiti 01, 02	8
Graffiti 03	9
Nicks and cuts	
Deep cuts or gouges	
Stolen doors	
Posters and stickers	
COLOUR MATCHING	11
COLOURS	12
CONTACT VALMONT GLOBAL	13

Terms of delivery can be downloaded from our website or by request
sales@tehomet.com
www.woodenpoles.com/downloads
www.tehomet.com

Tehomet (a Valmont company) Wooden Poles are engineered to perform to the same standards as steel and aluminium poles. Tehomet grants warranty for structure and components in delivered products. Products are warranted for a period of two (2) years from the date of original delivery date against manufacturing and material defects. All the terms of delivery must be complied.

VALMONT PROCESS OF STAIN APPLICATION

- The water based system has been chosen by Valmont Inc. because of its efficiency and lower environmental impacts.
- Wood is a natural material and it is expected to expand and shrink as the seasons and moisture change. Our elastic coating is designed to expand and shrink with the wood without cracking.

OUR COATING SYSTEM

- The first layer is a preservative which protects the wood from blue stain fungi, mildew and rot.
- The second layer is then applied to give the wood its final colour.
- To receive optimized thickness of varnish, 2 layers of colour tinted varnish are applied to protect against UV radiation.

TO ENSURE THE QUALITY OF THE SYSTEM

- A spray gun is used to ensure a consistent coating.
- Drying chamber is applied on each layer to increase the quality of coating system.

A spray gun



Drying chamber



A SCHEDULED MAINTENANCE PROGRAM IS RECOMMENDED TO MAXIMIZE THE LIFE TIME OF YOUR WOODEN POLE

UV radiation and humidity are the main reasons for degradation of the surface finish. These two phenomena change the aesthetic of the pole. With no maintenance, the effectiveness of the coating will decrease progressively and make defects in the wood possible.

AGING

1st stage, the aesthetic effects*



Gradual loss of the glossiness of the finish can be noticed. Micro-cracks may appear.

2nd stage, the aesthetic effects*



Some parts of the pole may begin to lose layers of finish. This may cause some discontinuity in the surface colour. Places without stain may become grey. Cracks may appear.

* Colours in example images are not the same. Images display the gradual loss of colour in surface.

FIRST SIGNS OF AGING

The evolution of the aging depends on the level of sunlight and the alternation between humid and dry periods. For that reason the installation location should be taken into account when choosing the initial colour. Shades in the middle of the colour range show fewer sign of aging.

The first stage is running from 2 to 5 years, except on direct sea side, with the sanding effect that damages all the materials, even steel.

MAINTENANCE PROCEDURE

Maintenance can be performed on-site while the pole is in upright position throughout the life time of the pole.

Actions required depend on the signs of aging of the pole after the first inspection.

PHASES SIMPLIFIED

Phase 1: Inspection

Check for signs of wear or damage. If none is found, further actions are not necessary.

Phase 2: Cleaning

Clean the surface from all dust and debris using water and soap if needed.

Phase 3: Sanding and Revarnishing


Superficial surface damage can be easily removed with sanding paper. Filler can be used to hide deeper nicks and gouges. Once the effected area is repaired the surface can then be easily revarnished.

NON-DESTRUCTIVE TESTING

Simple test is recommended to investigate the moisture level and condition of the pole.


- Push wood section firmly above the steel base section.
- Remove the door and push the wood from the inside the pole.

If the wood feels soft contact Valmont specialist for advise.

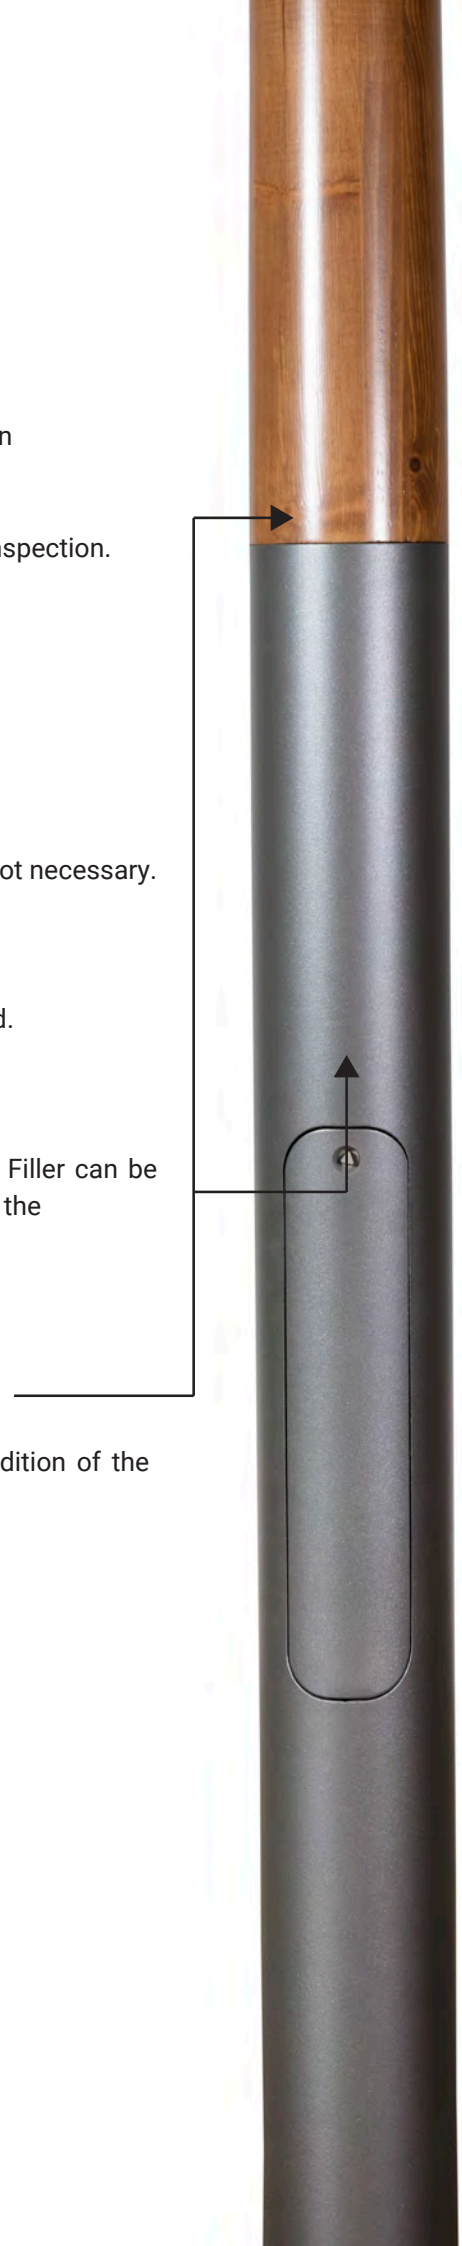

MAINTENANCE KITS

Maintenance kits are prepared for different levels of treatment required. Contact should be made with your Valmont representative along with photograph to quantify the issue and assist with selection of the correct maintenance kit.



Maintenance kit HK01

For small area surface treatment

COLOURS:

Coloured varnish (UV)	100 ml
Colour	10 ml

TOOLS:

Brush	1 pcs
Sponge	1 pcs
Sanding block	1 pcs



Maintenance kit HK02

Medium-sized maintenance and repair

COLOURS:

Coloured varnish (UV)	500 ml
Colour	100 ml
Steel repair bottle	5 ml

(RAL-tones 1:1 only, no wet-paints)

TOOLS:

Brush	1 pcs
Sponge with wooden handle	1 pcs
Sanding paper	1 pcs
Mixing container	1 pcs
Wooden mixing tool	1 pcs

REPAIR:

Coloured putty	1 pcs (Epoxy resin)
Hardener	1 pcs (Epoxy Hardener)



Maintenance kit HK03

Full-scale maintenance procedure

COLOURS:

Coloured varnish (UV)	9 l
Colour	500 ml

TOOLS:

Brush	1 pcs
Sponge with wooden handle	1 pcs
Sanding paper	1 pcs (hardness 120)
Mixing container	1 pcs
Wooden mixing tool	1 pcs

REPAIR:

Coloured putty	1 pcs (Epoxy resin)
Hardener	1 pcs (Epoxy Hardener)




RECOMMENDED MAINTENANCE CONDITIONS

- The outside temperature must be above 18°C before refinishing the pole can be performed.
- The surface temperature of the pole should not be greater than 50°C.
- Humidity should be less than 70%.




These are the requirements of our system, you must check with other providers for other systems.

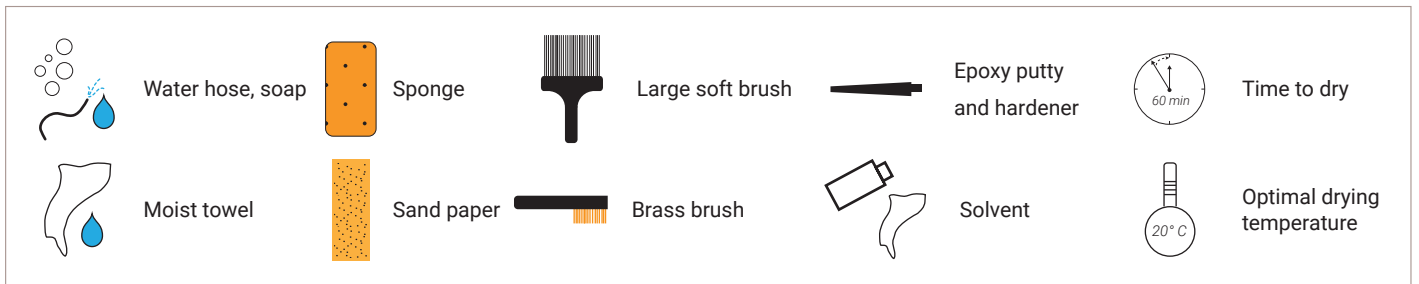SYMBOL LEGEND



STANDARD COATING REVISION

This process should be performed at the first sign of aging. It enables to maintain the aesthetic of the pole by ensuring the finish is thick enough to protect the wood.

-  Clean the surface from all dust and debris.
-  Use soap if needed. Rinse thoroughly. Let it dry.
-  Apply layer of varnish*. Use large soft brush. Avoid spills and runs of the varnish.

NOTE:
Use only water based solution:

- * - Aquatop 2920-04 from TEKNOS
- other equivalent system

Cleaning




REFINISHING THE POLE

This process is used to refinish the pole when the initial recommended maintenance has not been followed.

At this stage of aging, it may not be possible to fully restore colour and fill in micro cracks, by adding a new specific layers. Correct thickness of the coating can be restored to protect the wood.

The new layers have the same durability as the original coating from the factory. Maintenance procedures can be performed throughout the life time of the pole.

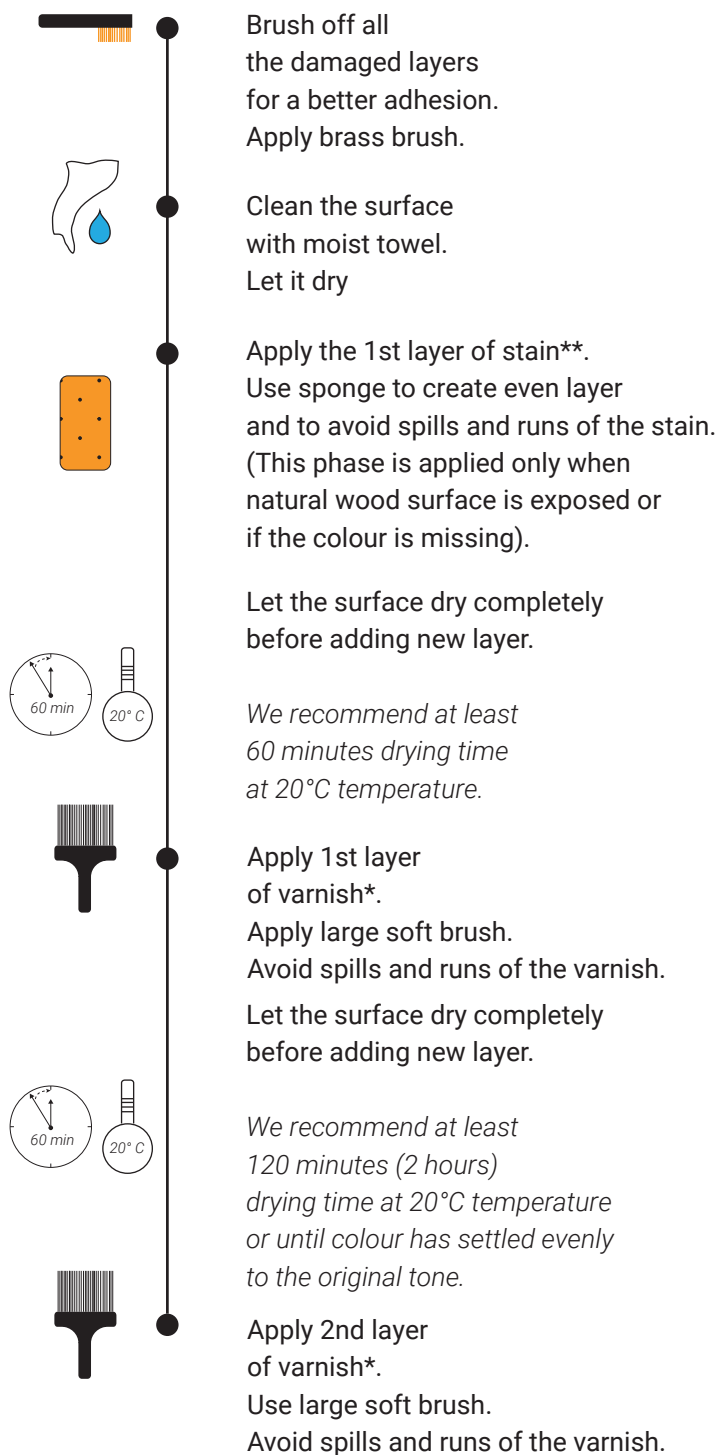

Brushing



NOTE:

Use only water based solution:

*

- Aquatop 2920-04 from TEKNOS
- other equivalent system

**

- Aqua Primer 2900-02 from TEKNOS
- other equivalent system.

VANDALISM CORRECTIONS

GRAFFITI


01



Clean the affected area with a solvent.

If necessary the affected area can be touched with coloured varnish*
Avoid spills and runs of the varnish.

02



If the solvent is not effective, graffiti can be removed with sandpaper



If the base colour of the pole remains after the graffiti is removed, reapply the coloured varnish* to complete the repair.
Avoid spills and runs of the varnish.

Sanding



NOTE:

Use only water based solution:

*

- Aquatop 2920-04 from TEKNOS
- other equivalent system

**

- Aqua Primer 2900-02 from TEKNOS
- other equivalent system.

VANDALISM CORRECTIONS

GRAFFITI

03

If the base colour is removed it will need to be reapplied:



Brush off all the damaged layers for a better adhesion.
Apply brass brush.




Clean the surface with moist towel.
Let it dry



Apply the 1st layer of stain**. Use sponge to create even layer and to avoid spills and runs of the stain. (This phase is applied only when natural wood surface is exposed or if the colour is missing).


Let the surface dry completely before adding new layer.



We recommend at least 60 minutes drying time at 20°C temperature.



Apply 1st layer of varnish*.
Apply large soft brush.
Avoid spills and runs of the varnish.
Let the surface dry completely before adding new layer.



We recommend at least 120 minutes (2 hours) drying time at 20°C temperature or until colour has settled evenly to the original tone.



Apply 2nd layer of varnish*.
Apply large soft brush.
Avoid spills and runs of the varnish.

Applying varnish



NOTE:

Use only water based solution:

- *
 - Aquatop 2920-04 from TEKNOS
 - other equivalent system

- **
 - Aqua Primer 2900-02 from TEKNOS
 - other equivalent system.

VANDALISM CORRECTIONS

NICKS AND CUTS




- For small nicks in the surface, a colour layer ** can be applied locally to restore the surface. The age of the pole affects on colour contrast and end result.

STOLEN DOORS

- Replacement is possible.
- Communicate the order references concerning the door opening sizes and positioning of the door with a local Valmont Inc. sales office.



DEEP CUTS OR GOUGES



- Mix epoxy putty and hardener (ratio 5:1) and fill the hole.
- After the putty has cured, sand it smooth.
- Once sanded, the base colour ** of the pole can be reapplied, if needed.
- Repeat if needed

See section
REFINISHING THE POLE



POSTERS AND STICKERS

- Try to remove the sticker or poster with warm water or water hose.
- Alcohol can be used to remove any residual glue or adhesive.
- Once dry, if you notice any difference in gloss of the stain, locally apply one layer of translucent coat (see Refinishing of the pole).

Applying epoxy



NOTE:

Use only water based solution:

*

- Aquatop 2920-04 from TEKNOS
- other equivalent system

**

- Aqua Primer 2900-02 from TEKNOS
- other equivalent system.


COLOUR MATCHING

To allow a perfect continuity with existing wood poles, it is possible to measure the colour composition of material already installed. Measurement is done with a specific portable device (CIE-LAB colour space).

The results obtained enable our stain supplier to produce a new stain with the matching colour.

POSSIBILITIES TO MEASURE THIS COLOUR COMPOSITION

- From a sample sent to our plant.
- On site, on installed pole / furniture.
Visit by Valmont Inc. trained specialist.

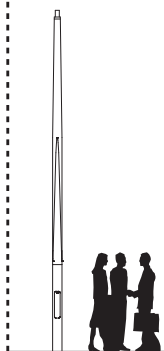

valmont 
STRUCTURES





Colour measurement



COLOURS

Standard range has 9 colours with smooth and brushed finishes.

Smooth surface is sanded and brushed is giving the aged look for the pole.

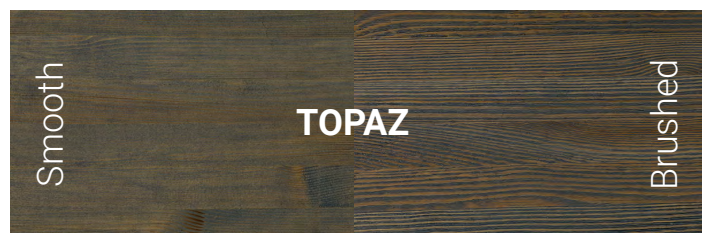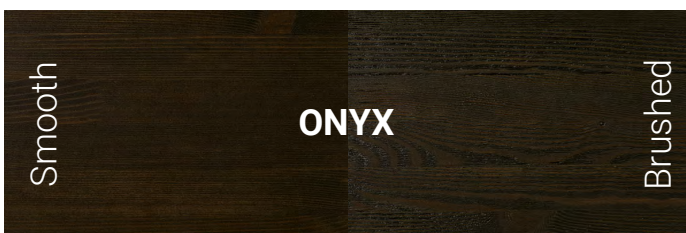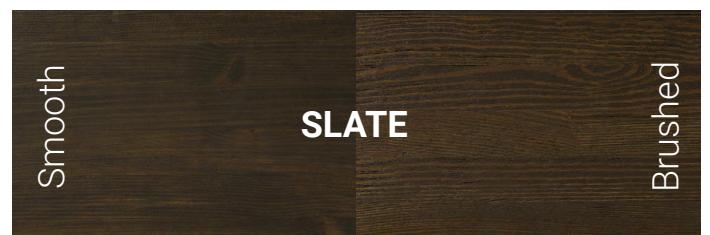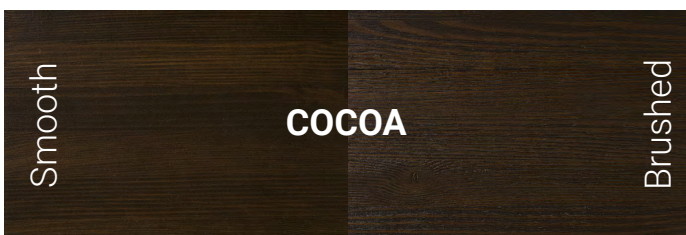

Due to printing techniques, the colours presented may differ from reality.

Valmont Structures

28800 Ida Street
P.O. Box 358
Valley, NE 68064-0358
United States
Phone: +1 402 359 2201

Valmont West Coast Engineering

100 Ellis Drive
Barrie, ON L4N 9B2
Canada
Phone: +1 705 721 1090

www.valmontstructures.com/contact/find-your-rep/

Valmont Structures France

Les Martoulets - BP1
03110 Charmeil
Phone : +33 470588686
Email: contact@valmont-france.com

Valmont Nederland B.V.

Den Engelsman 3
6026 RB Maarheeze
Netherlands
Phone: (31) 495 599 959
Email: info.nl@valmont.com

Valmont Structures Belgium

Bosdel 61
3600 Genk
Belgium
Phone: +32(0) 89 680234
Email: info.be@valmont.com

Valmont Stainton Ltd

Dukesway
Teesside Industrial Estate
Thornaby
Stockton-on-Tees
TS17 9LT
UK
Phone: (+44) 01642 766242
Email: stainton@valmont.com

Valmont Polska Sp. z o.o.

Majora Henryka Sucharskiego 6
08-110 Siedlce
Poland
Phone: +48 25 643 0400
Email: valmont@valmont.com

Valmont s.a.r.l.

Z.I. Berrechid
Route principale No7
26100 Berrechid
Morocco
Phone: (+212) 522 33 72 06
Email: info-valmont-maroc@valmont.com

Middle East

UAE Phone: +971 (50) 4693054
International Phone: +90 532 4267570
Email: volkanasti@valmont.com

www.valmontstructures.eu

PALLAS
INARI
RUKA
KOLI
IVALO
BALLAD
3-24m
SEKA
ONTELO
LEMPEÄ
LAINE
KAISLA
RYTMI
TEMPO



For further information, please
contact: sales@tehomet.com
Tel. +358 15 337 7770

TEHOMET OY
Linjakuja 2
FI-59100 PARIKKALA
FINLAND

www.woodenpoles.com
www.tehomet.com